

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
	TYPE OF SERVICE:	
REPRESENTATIVE:	SUBMITTED BY:	DATE:
ENGINEER:	APPROVED BY:	DATE:
CONTRACTOR:	ORDER NO.:	DATE:



ALPHA2 15-55FR


ALPHA2 15-55 is a high-efficiency ECM variable speed circulator designed for a variety of heating and hot-water recirculation applications. The pump features AUTOADAPT and constant-pressure control modes.

Note! Product picture may differ from actual product

Conditions of Service		
Liquid:	Water	
Temperature:	140 °F	
Specific Gravity:	0.985	


Pump Data	
Maximum operating pressure:	145.04 psi
Liquid temperature range:	35.6 230 °F
Maximum ambient temperature:	104 °F
Approvals:	ETL, FCC
Pipe connection:	1 1/2
Product number:	99163932


Motor Data				
P1 max:	5 45 W			
Rated voltage:	115 V			
Mains frequency:	60 Hz			
Enclosure class:	IP42			
Insulation class:	F			
Motor protection:	NONE			
Thermal protection:	ELEC			

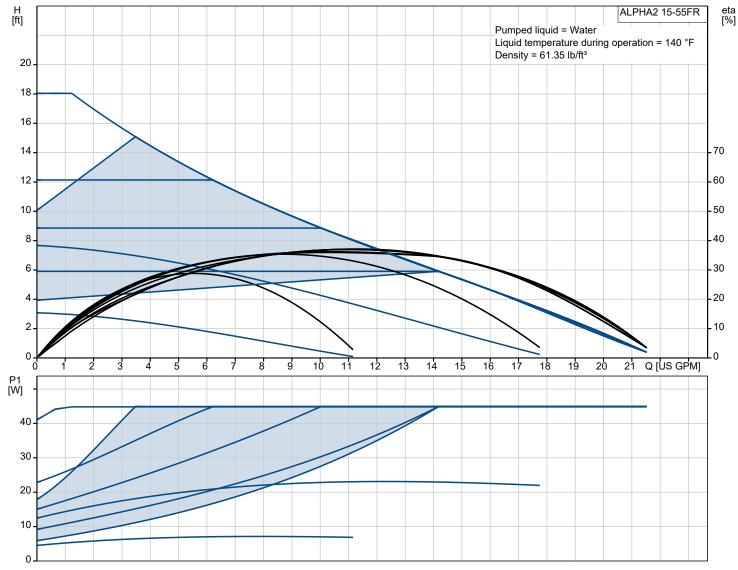


Submittal Data









Materials:

Pump housing: Cast iron

Pump housing: EN 1561 EN-GJL-150

Impeller: Composite

Description	Value	
General information:		
Product name:	ALPHA2 15-55FR	
Product No:	99163932	
EAN number:	5712607918583	
Technical:		
Head max:	18.05 ft	
TF class:	110	
Approvals on nameplate:	ETL, FCC	
Materials:		
Pump housing:	Cast iron	
Pump housing:	EN 1561 EN-GJL-150	
Impeller:	Composite	
Installation:		
Range of ambient temperature:	32 104 °F	
Maximum operating pressure:	145.04 psi	
Type of connection:	GF	
Pipe connection:	1 1/2	
Pressure rating:	PN 10	
Port-to-port length:	6 1/2 in	
Liquid:		
Pumped liquid:	Water	
Liquid temperature range:	35.6 230 °F	
Selected liquid temperature:	140 °F	
Density:	61.35 lb/ft ³	
Electrical data:		
Power input - P1:	5 45 W	
Mains frequency:	60 Hz	
Rated voltage:	1 x 115 V	
Maximum current consumption:	0.1 0.65 A	
Enclosure class (IEC 34-5):	IP42	
Insulation class (IEC 85):	F	
Built-in motor protection:	NONE	
Thermal protec:	ELEC	
Controls:		
Pos term box:	6H	
Others:		
Net weight:	6.73 lb	
Gross weight:	7.35 lb	
Shipping volume:	0.28 ft³	
Sales region:	USA	

