


Pump Performance Datasheet

Customer :	Quote Number / ID :	1471203
Customer ref. / PO :	Model :	20955 VL
Tag Number : 001	Stages :	1
Service :	Based on curve number :	VL_20955_2P Rev Aug21
Quantity : 1	Basic model number :	-
	Date last saved :	11/03/2023 5:27 PM

Operating Conditions		Liquid	
Flow, rated	: 228.8 USgpm	Liquid type	: Cold Water
Differential head / pressure, rated (requested)	: 322.2 ft	Additional liquid description	:
Differential head / pressure, rated (actual)	: 322.2 ft	Solids diameter, max	: 0.00 in
Suction pressure, rated / max	: 0.00 / 0.00 psi.g	Solids concentration, by volume	: 0.00 %
NPSH available, rated	: Ample	Temperature, max	: 68.00 deg F
Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.000 SG
		Viscosity, rated	: 1.00 cP
		Vapor pressure, rated	: 0.34 psi.a
Performance		Material	
Speed, rated	: 3550 rpm	Material selected	: Cast iron - 125#
Impeller diameter, rated	: 9.60 in		
Impeller diameter, maximum	: 9.60 in	Pressure Data	
Impeller diameter, minimum	: 7.50 in	Maximum working pressure	: 167.7 psi.g
Efficiency	: 56.04 %	Maximum allowable working pressure	: 175.0 psi.g
NPSH required / margin required	: 58.21 / 0.00 ft	Maximum allowable suction pressure	: 175.0 psi.g
nq (imp. eye flow) / S (imp. eye flow)	: 14 / 49 Metric units	Hydrostatic test pressure	: 263.0 psi.g
MCSF	: 66.56 USgpm		
Head, maximum, rated diameter	: 387.6 ft	Driver & Power Data (@Max density)	
Head rise to shutoff	: 19.68 %	Motor sizing specification	: Max power (non-overloading)
Flow, best eff. point	: 228.8 USgpm	Margin over specification	: 0.00 %
Flow ratio, rated / BEP	: 100.00 %	Service factor	: 1.00
Diameter ratio (rated / max)	: 100.00 %	Power, hydraulic	: 18.61 hp
Head ratio (rated dia / max dia)	: 100.00 %	Rated power (based on duty point)	: 33.21 hp
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00	Max power (non-overloading)	: 36.35 hp
Selection status	: Acceptable	Nameplate motor rating	: 40.00 hp / 29.83 kW
Energy Indexes			
PEI (CL)	: 0.95		
ER (CL)	: 5		

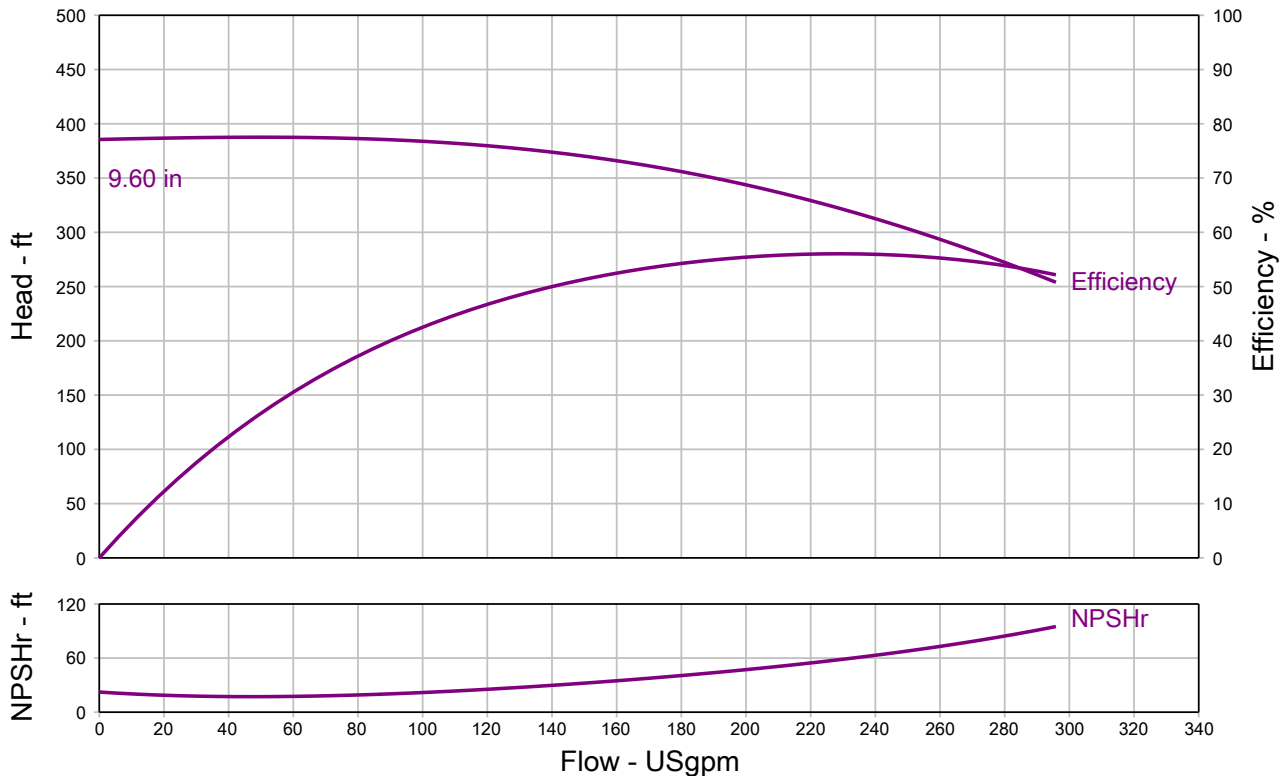

Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled


QUOTE NUMBER / ID 1471203	UNIT TAG 001	QUANTITY 1
REPRESENTATIVE	SERVICE	
ENGINEER	SUBMITTED BY	DATE
CONTRACTOR	APPROVED BY	DATE
	ORDER #	DATE



VL 20955
3550 rpm

Part Number N/A

Conditions of Service		Pump Data		Motor Data	
Flow	228.8 USgpm	Impeller Diameter	9.60 in	Motor HP	40 HP
Head	322.2 ft	Max. Imp. Dia.	9.60 in	BHP	33.21 HP
Liquid	Cold Water	Min. Imp. Dia.	7.50 in	Enclosure	TEFC
Temperature	68.00 deg F	Efficiency	56.04 %	Voltage	230/460 V
NPSHr	58.21 ft	Suction	2 in.	Phase	3 Phase
Viscosity	1.00 cP	Discharge	2 in.	Cycle	60
Specific Gravity	1.000 SG	PEI (CL)	0.95	Frame Size	324JM
		ER (CL)	5		

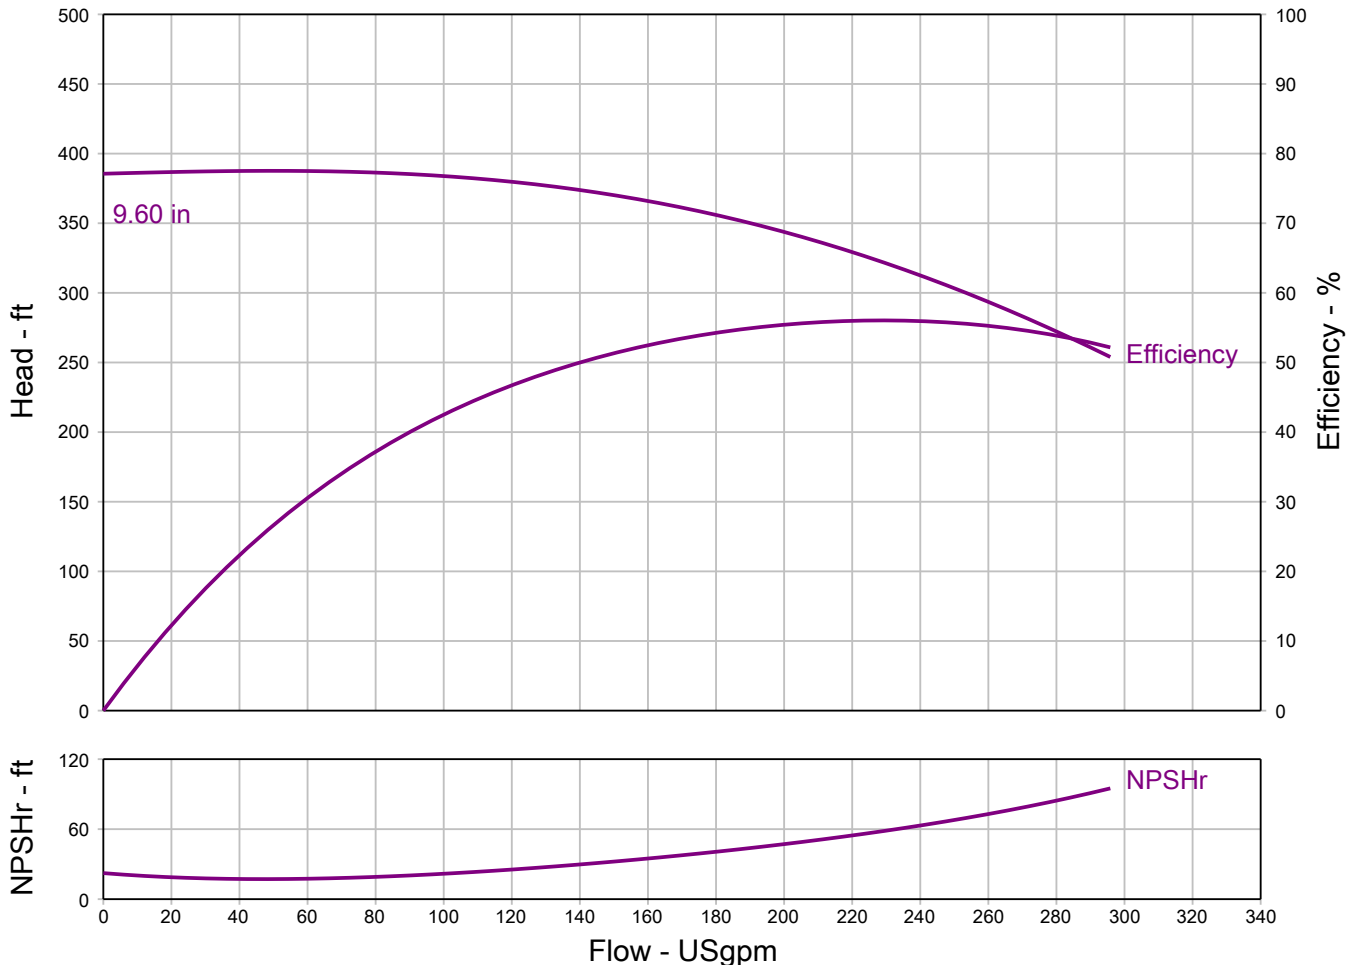

Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled

Do not install pump larger than 215JM in vertical piping.

Pressure and drain tap locations are approximate.

Suction and discharge flanges, are cast per 250# ANSI thickness and diameter. All flanges are flat face. Some holes may be threaded because of nut clearances.



NOT FOR CONSTRUCTION, unless certified and referenced on order

Units	Frame	S x D	AG (Max)	DC	DD	DE	E	P (Max)	X	YY	Weight
inches	324JM	2 X 2	30.00	6.00	4.88	6.25	1.50	17.00	9.00	9.00	TBD