


Pump Performance Datasheet

| | | |
|----------------------|-------------------------|-----------------------|
| Customer : | Quote Number / ID : | 1471203 |
| Customer ref. / PO : | Model : | 25953 VL |
| Tag Number : 001 | Stages : | 1 |
| Service : | Based on curve number : | VL_25953_2P Rev Aug21 |
| Quantity : 1 | Basic model number : | - |
| | Date last saved : | 11/03/2023 6:01 PM |

| Operating Conditions | | Liquid | |
|---|---------------------|---------------------------------|--------------------|
| Flow, rated | : 333.1 USgpm | Liquid type | : Cold Water |
| Differential head / pressure, rated (requested) | : 216.9 ft | Additional liquid description | : |
| Differential head / pressure, rated (actual) | : 217.7 ft | Solids diameter, max | : 0.00 in |
| Suction pressure, rated / max | : 0.00 / 0.00 psi.g | Solids concentration, by volume | : 0.00 % |
| NPSH available, rated | : Ample | Temperature, max | : 68.00 deg F |
| Site Supply Frequency | : 60 Hz | Fluid density, rated / max | : 1.000 / 1.000 SG |
| | | Viscosity, rated | : 1.00 cP |
| | | Vapor pressure, rated | : 0.34 psi.a |

| Performance | | Material | |
|--|-----------------------------|-------------------|----------------|
| Speed, rated | : 3550 rpm | Material selected | : Ductile iron |
| Impeller diameter, rated | : 8.09 in | | |
| Impeller diameter, maximum | : 9.60 in | | |
| Impeller diameter, minimum | : 7.00 in | | |
| Efficiency | : 67.18 % | | |
| NPSH required / margin required | : 46.51 / 0.00 ft | | |
| nq (imp. eye flow) / S (imp. eye flow) | : 20 / 62 Metric units | | |
| MCSF | : 100.3 USgpm | | |
| Head, maximum, rated diameter | : 271.0 ft | | |
| Head rise to shutoff | : 23.61 % | | |
| Flow, best eff. point | : 333.2 USgpm | | |
| Flow ratio, rated / BEP | : 99.99 % | | |
| Diameter ratio (rated / max) | : 84.27 % | | |
| Head ratio (rated dia / max dia) | : 64.30 % | | |
| Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010] | : 1.00 / 1.00 / 1.00 / 1.00 | | |
| Selection status | : Acceptable | | |

| Energy Indexes | | Pressure Data | |
|----------------|--------|------------------------------------|---------------|
| PEI (CL) | : 0.94 | Maximum working pressure | : 117.3 psi.g |
| ER (CL) | : 6 | Maximum allowable working pressure | : 400.0 psi.g |
| | | Maximum allowable suction pressure | : 400.0 psi.g |
| | | Hydrostatic test pressure | : 600.0 psi.g |

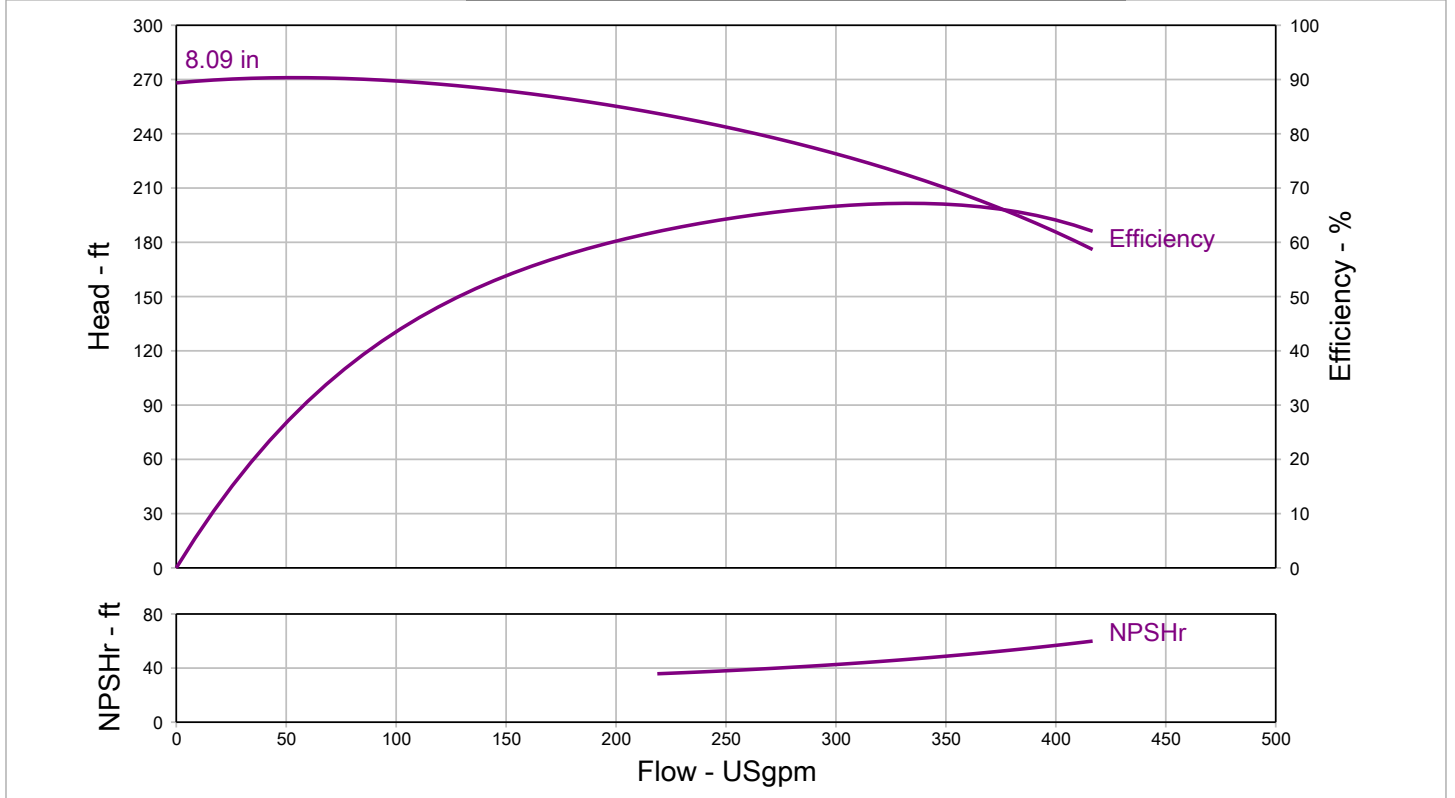

Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled


| | | |
|----------------------------------|---------------------|-------------------|
| QUOTE NUMBER / ID 1471203 | UNIT TAG 001 | QUANTITY 1 |
| REPRESENTATIVE | SERVICE | |
| ENGINEER | SUBMITTED BY | DATE |
| CONTRACTOR | APPROVED BY | DATE |
| | ORDER # | DATE |



VL 25953
3550 rpm

Part Number N/A

| Conditions of Service | | Pump Data | | Motor Data | |
|-----------------------|-------------|-------------------|---------|------------|-----------|
| Flow | 333.1 USgpm | Impeller Diameter | 8.08 in | Motor HP | 30 HP |
| Head | 216.9 ft | Max. Imp. Dia. | 9.60 in | BHP | 27.15 HP |
| Liquid | Cold Water | Min. Imp. Dia. | 7.00 in | Enclosure | TEFC |
| Temperature | 68.00 deg F | Efficiency | 67.18 % | Voltage | 230/460 V |
| NPSHr | 46.51 ft | Suction | 2.5 in. | Phase | 3 Phase |
| Viscosity | 1.00 cP | Discharge | 2.5 in. | Cycle | 60 |
| Specific Gravity | 1.000 SG | PEI (CL) | 0.94 | Frame Size | 286JM |
| | | ER (CL) | 6 | | |

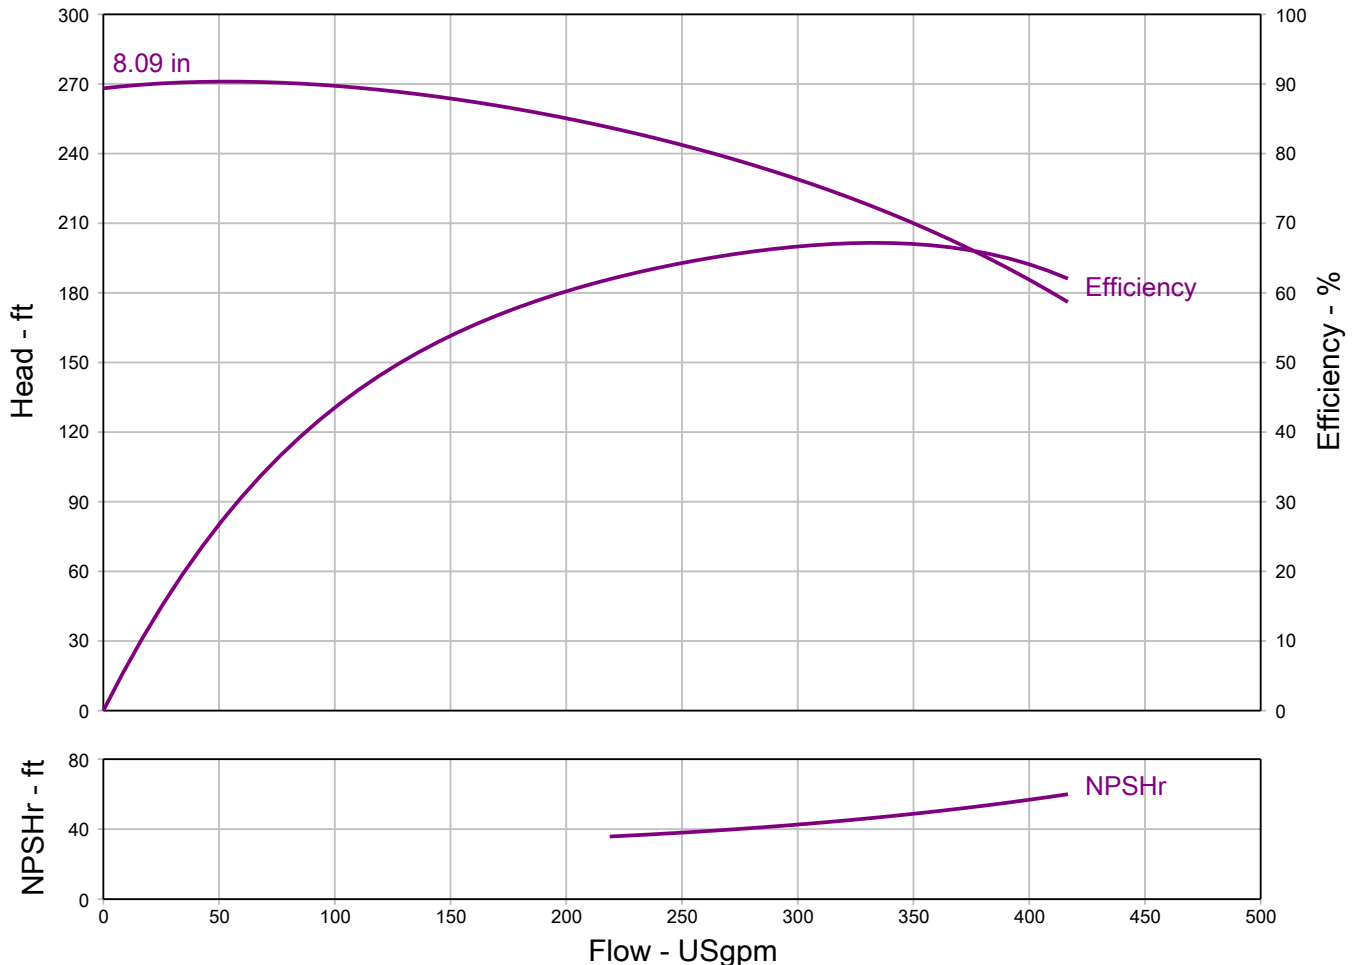


Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled

Do not install pump larger than 215JM in vertical piping.

Pressure and drain tap locations are approximate.

Suction and discharge flanges, are cast per 250# ANSI thickness and diameter. All flanges are flat face. Some holes may be threaded because of nut clearances.

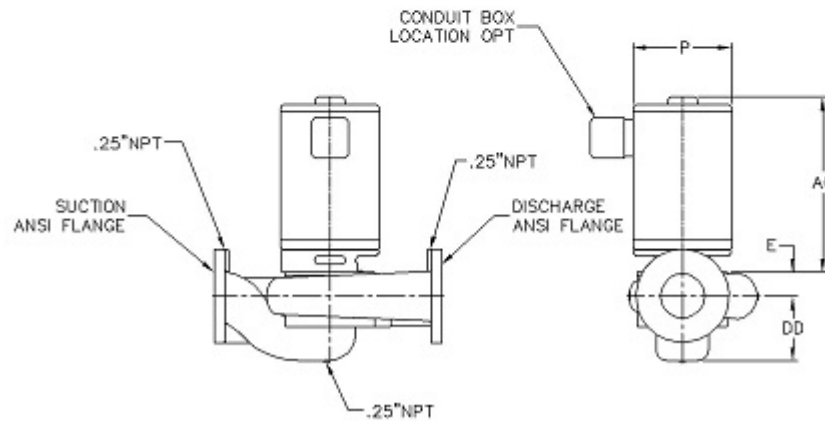

NOT FOR CONSTRUCTION, unless certified and referenced on order

| Units | Frame | S x D | AG (Max) | DC | DD | DE | E | P (Max) | X | YY | Weight |
|--------|-------|-----------|----------|------|------|------|------|---------|------|------|--------|
| inches | 286JM | 2.5 X 2.5 | 26.00 | 6.13 | 6.25 | 6.56 | 1.88 | 15.00 | 9.50 | 9.50 | TBD |