


Pump Performance Datasheet

Customer :	Quote Number / ID :	1471203
Customer ref. / PO :	Model :	2095A VL
Tag Number : 001	Stages :	1
Service :	Based on curve number :	VL_2095A_4P Rev 0
Quantity : 1	Basic model number :	-
	Date last saved :	11/06/2023 2:14 PM

Operating Conditions		Liquid	
Flow, rated	: 91.86 USgpm	Liquid type	: Cold Water
Differential head / pressure, rated (requested)	: 67.57 ft	Additional liquid description	:
Differential head / pressure, rated (actual)	: 67.57 ft	Solids diameter, max	: 0.00 in
Suction pressure, rated / max	: 0.00 / 0.00 psi.g	Solids concentration, by volume	: 0.00 %
NPSH available, rated	: Ample	Temperature, max	: 68.00 deg F
Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.000 SG
		Viscosity, rated	: 1.00 cP
		Vapor pressure, rated	: 0.34 psi.a
Performance		Material	
Speed, rated	: 1760 rpm	Material selected	: Cast iron - 125#
Impeller diameter, rated	: 9.60 in		
Impeller diameter, maximum	: 9.60 in	Pressure Data	
Impeller diameter, minimum	: 7.00 in	Maximum working pressure	: 40.23 psi.g
Efficiency	: 54.89 %	Maximum allowable working pressure	: 175.0 psi.g
NPSH required / margin required	: 13.94 / 0.00 ft	Maximum allowable suction pressure	: 175.0 psi.g
nq (imp. eye flow) / S (imp. eye flow)	: 14 / 45 Metric units	Hydrostatic test pressure	: 263.0 psi.g
MCSF	: 27.84 USgpm		
Head, maximum, rated diameter	: 92.96 ft	Driver & Power Data (@Max density)	
Head rise to shutoff	: 37.50 %	Motor sizing specification	: Max power (non-overloading)
Flow, best eff. point	: 91.86 USgpm	Margin over specification	: 0.00 %
Flow ratio, rated / BEP	: 100.00 %	Service factor	: 1.00
Diameter ratio (rated / max)	: 100.00 %	Power, hydraulic	: 1.57 hp
Head ratio (rated dia / max dia)	: 100.00 %	Rated power (based on duty point)	: 2.85 hp
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00	Max power (non-overloading)	: 2.98 hp
Selection status	: Acceptable	Nameplate motor rating	: 3.00 hp / 2.24 kW
Energy Indexes			
PEI (CL)	: 0.94		
ER (CL)	: 6		

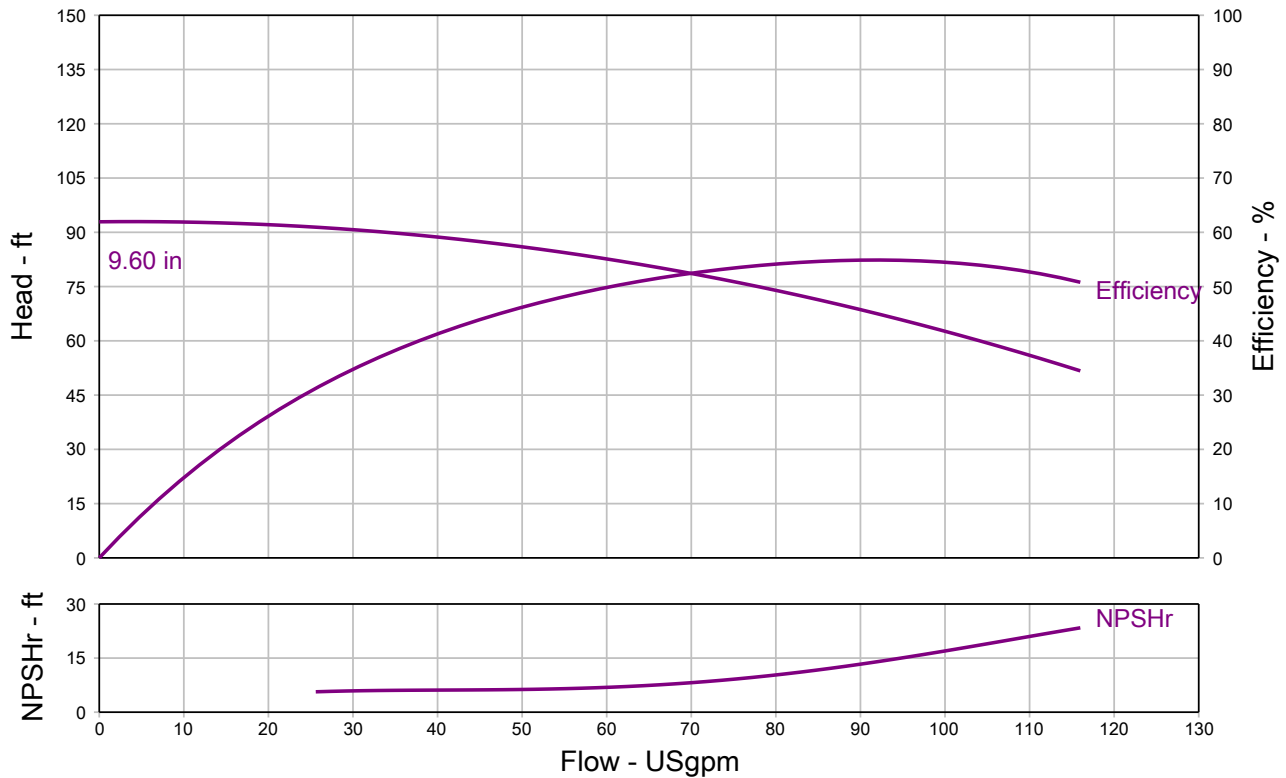

Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled


QUOTE NUMBER / ID 1471203	UNIT TAG 001	QUANTITY 1
REPRESENTATIVE	SERVICE	
ENGINEER	SUBMITTED BY	DATE
CONTRACTOR	APPROVED BY	DATE
	ORDER #	DATE



VL 2095A
1760 rpm

Part N/A
Number

Conditions of Service		Pump Data		Motor Data	
Flow	91.86 USgpm	Impeller Diameter	9.60 in	Motor HP	3 HP
Head	67.57 ft	Max. Imp. Dia.	9.60 in	BHP	2.85 HP
Liquid	Cold Water	Min. Imp. Dia.	7.00 in	Enclosure	TEFC
Temperature	68.00 deg F	Efficiency	54.89 %	Voltage	230/460 V
NPSHr	13.94 ft	Suction	2 in.	Phase	3 Phase
Viscosity	1.00 cP	Discharge	2 in.	Cycle	60
Specific Gravity	1.000 SG	PEI (CL)	0.94	Frame Size	182JM
		ER (CL)	6		

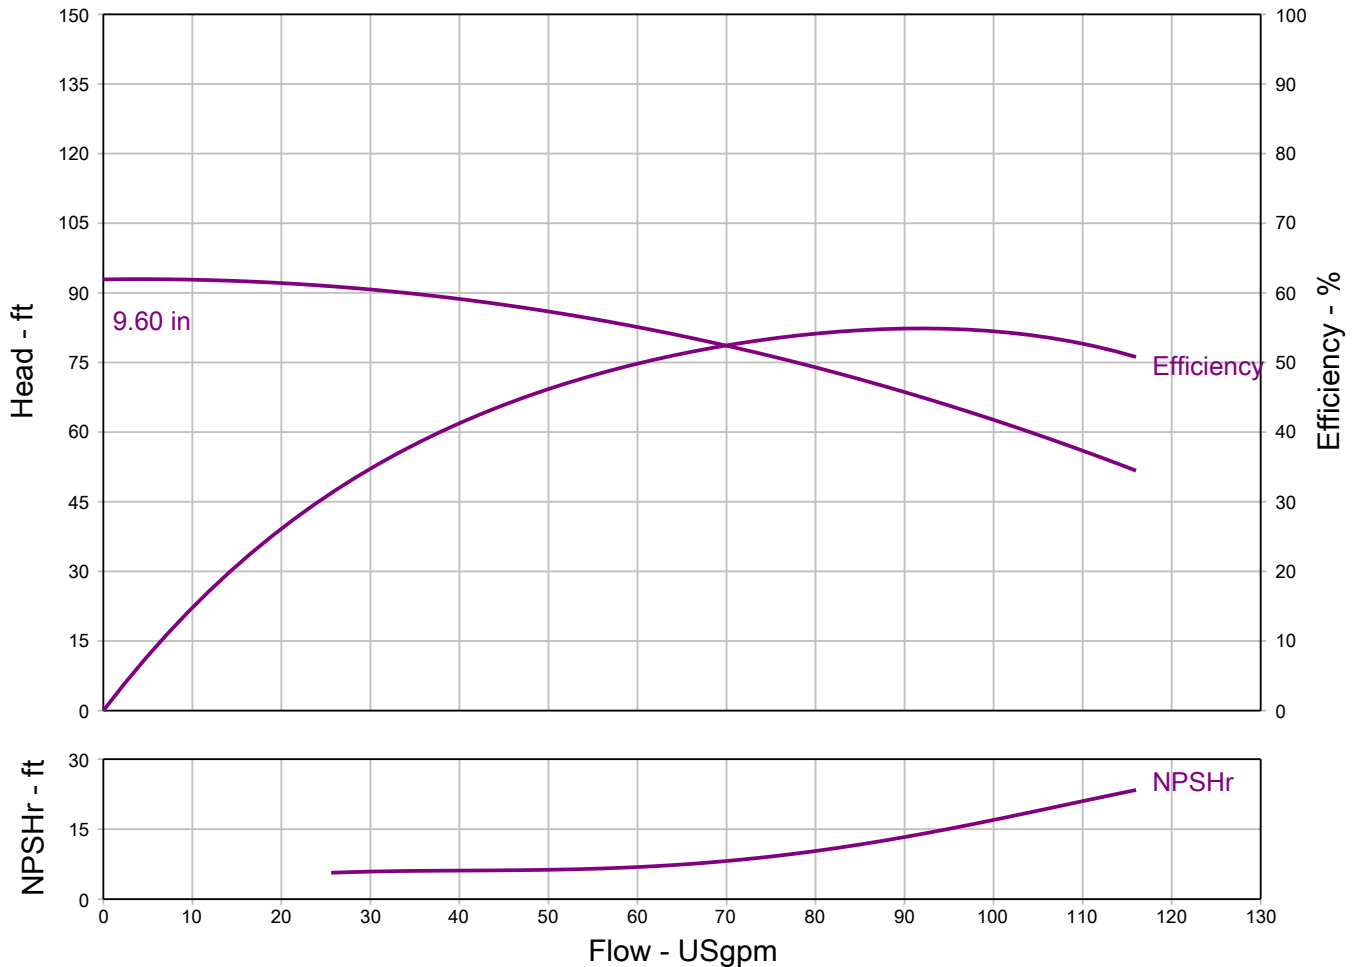


Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled

Do not install pump larger than 215JM in vertical piping.

Pressure and drain tap locations are approximate.

Suction and discharge flanges, are cast per 250# ANSI thickness and diameter. All flanges are flat face. Some holes may be threaded because of nut clearances.

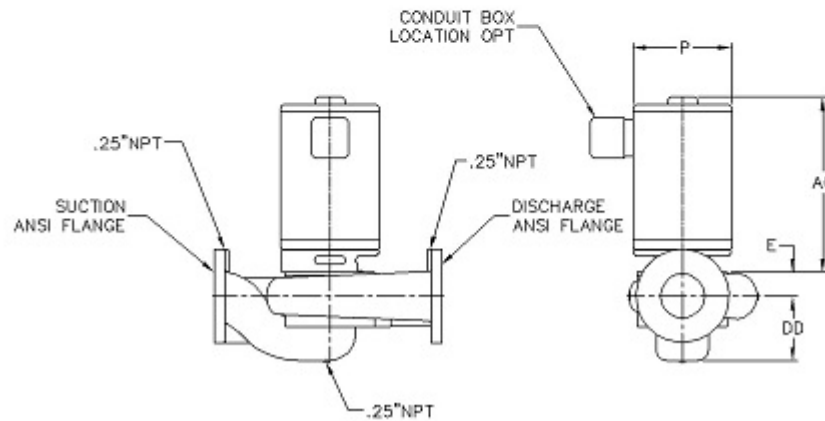

NOT FOR CONSTRUCTION, unless certified and referenced on order

Units	Frame	S x D	AG (Max)	DC	DD	DE	E	P (Max)	X	YY	Weight
inches	182JM	2 X 2	20.00	6.00	4.88	6.25	1.50	10.00	9.00	9.00	TBD