

## Pump Performance Datasheet


Customer :	Quote Number / ID :	1471203
Customer ref. / PO :	Model :	25953 VL
Tag Number : 001	Stages :	1
Service :	Based on curve number :	VL_25953_4P Rev Aug21
Quantity : 1	Basic model number :	-
	Date last saved :	11/06/2023 2:47 PM

Operating Conditions		Liquid	
Flow, rated	: 198.5 USgpm	Liquid type	: Cold Water
Differential head / pressure, rated (requested)	: 61.77 ft	Additional liquid description	:
Differential head / pressure, rated (actual)	: 61.98 ft	Solids diameter, max	: 0.00 in
Suction pressure, rated / max	: 0.00 / 0.00 psi.g	Solids concentration, by volume	: 0.00 %
NPSH available, rated	: Ample	Temperature, max	: 68.00 deg F
Site Supply Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.000 SG

Performance		Material	
Speed, rated	: 1760 rpm	Material selected	: Cast iron - 125#
Impeller diameter, rated	: 8.85 in		
Impeller diameter, maximum	: 9.60 in		
Impeller diameter, minimum	: 7.00 in		

Performance		Pressure Data	
Efficiency	: 67.72 %	Maximum working pressure	: 34.22 psi.g
NPSH required / margin required	: 13.98 / 0.00 ft	Maximum allowable working pressure	: 175.0 psi.g
nq (imp. eye flow) / S (imp. eye flow)	: 21 / 61 Metric units	Maximum allowable suction pressure	: 175.0 psi.g
MCSF	: 58.06 USgpm	Hydrostatic test pressure	: 263.0 psi.g
Head, maximum, rated diameter	: 79.07 ft		
Head rise to shutoff	: 26.51 %		
Flow, best eff. point	: 198.5 USgpm		
Flow ratio, rated / BEP	: 99.99 %		
Diameter ratio (rated / max)	: 92.19 %		
Head ratio (rated dia / max dia)	: 79.73 %		
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00		
Selection status	: Acceptable		

Energy Indexes		Driver & Power Data (@Max density)	
PEI (CL)	: 0.97	Motor sizing specification	: Max power (non-overloading)
ER (CL)	: 3	Margin over specification	: 0.00 %
		Service factor	: 1.00
		Power, hydraulic	: 3.10 hp
		Rated power (based on duty point)	: 4.57 hp
		Max power (non-overloading)	: 4.97 hp
		Nameplate motor rating	: 5.00 hp / 3.73 kW

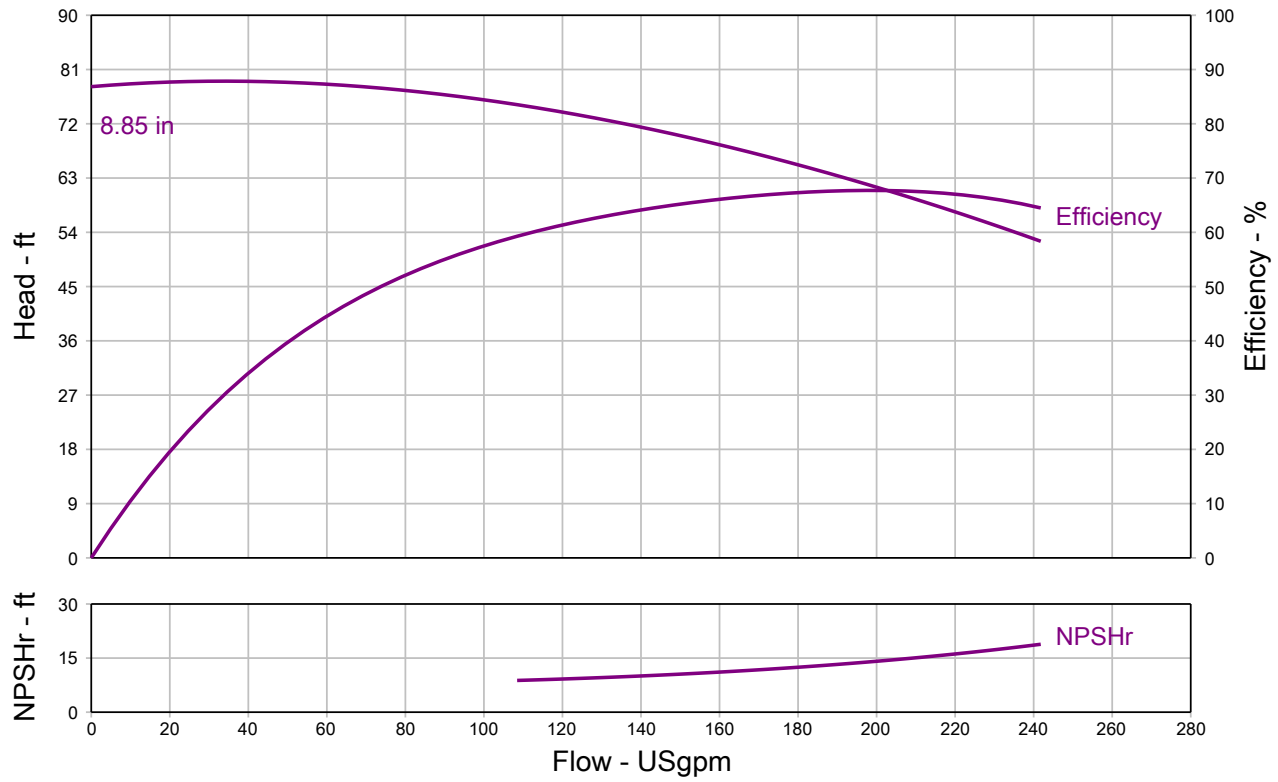

**Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled**


<b>QUOTE NUMBER / ID</b> 1471203	<b>UNIT TAG</b> 001	<b>QUANTITY</b> 1
<b>REPRESENTATIVE</b>	<b>SERVICE</b>	
<b>ENGINEER</b>	<b>SUBMITTED BY</b>	<b>DATE</b>
<b>CONTRACTOR</b>	<b>APPROVED BY</b>	<b>DATE</b>
	<b>ORDER #</b>	<b>DATE</b>



**VL 25953**  
**1760 rpm**

Part Number N/A

Conditions of Service		Pump Data		Motor Data	
Flow	198.5 USgpm	Impeller Diameter	8.84 in	Motor HP	5 HP
Head	61.77 ft	Max. Imp. Dia.	9.60 in	BHP	4.57 HP
Liquid	Cold Water	Min. Imp. Dia.	7.00 in	Enclosure	TEFC
Temperature	68.00 deg F	Efficiency	67.72 %	Voltage	230/460 V
NPSHr	13.98 ft	Suction	2.5 in.	Phase	3 Phase
Viscosity	1.00 cP	Discharge	2.5 in.	Cycle	60
Specific Gravity	1.000 SG	PEI (CL)	0.97	Frame Size	184JM
		ER (CL)	3		

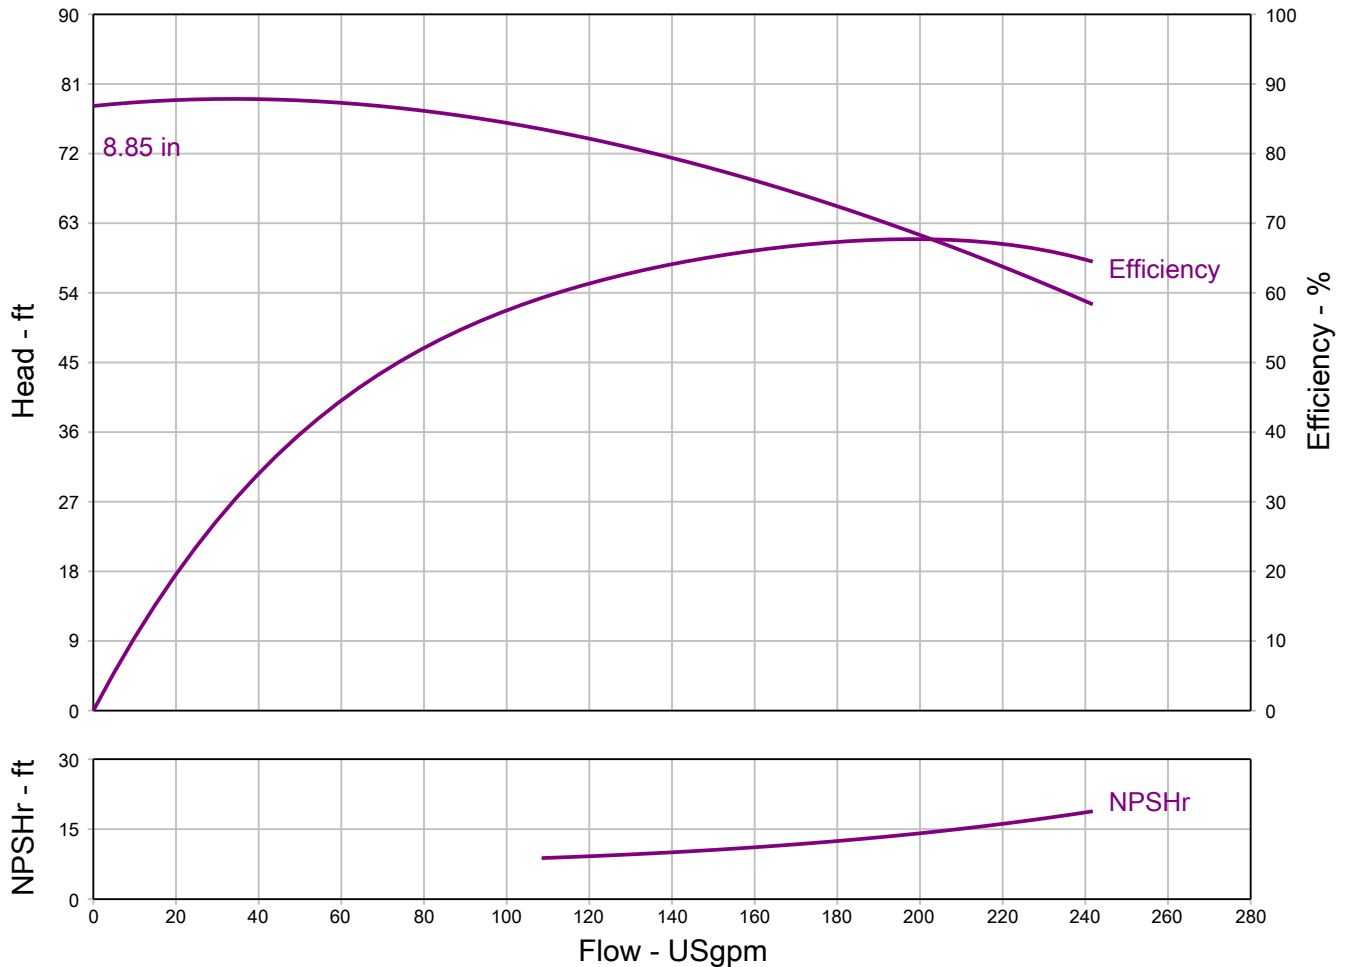

**Grundfos Series VL - In-Line Centrifugal Pump, Close Coupled**

Do not install pump larger than 215JM in vertical piping.

Pressure and drain tap locations are approximate.

Suction and discharge flanges, are cast per 250# ANSI thickness and diameter. All flanges are flat face. Some holes may be threaded because of nut clearances.



NOT FOR CONSTRUCTION, unless certified and referenced on order

Units	Frame	S x D	AG (Max)	DC	DD	DE	E	P (Max)	X	YY	Weight
inches	184JM	2.5 X 2.5	20.00	6.13	6.25	6.56	1.88	10.00	9.50	9.50	TBD