

## Pump Performance Datasheet

Customer :	Quote Number / ID :	1471203
Customer ref. / PO :	Model :	15709 VLS
Tag Number : 001	Stages :	1
Service :	Based on curve number :	VLS_15709_4P Rev 0
Quantity : 1	Basic model number :	-
	Date last saved :	01/18/2023 3:26 PM


Operating Conditions	Liquid
Flow, rated : 91.17 USgpm	Liquid type : Cold Water
Differential head / pressure, rated (requested) : 43.47 ft	Additional liquid description :
Differential head / pressure, rated (actual) : 43.47 ft	Solids diameter, max : 0.00 in
Suction pressure, rated / max : 0.00 / 0.00 psi.g	Solids concentration, by volume : 0.00 %
NPSH available, rated : Ample	Temperature, max : 68.00 deg F
Site Supply Frequency : 60 Hz	Fluid density, rated / max : 1.000 / 1.000 SG
	Viscosity, rated : 1.00 cP
	Vapor pressure, rated : 0.34 psi.a

Performance	Material
Speed, rated : 1730 rpm	Material selected : Cast iron - 125#
Impeller diameter, rated : 7.10 in	
Impeller diameter, maximum : 7.10 in	
Impeller diameter, minimum : 5.00 in	
Efficiency : 62.17 %	
NPSH required / margin required : 18.68 / 0.00 ft	
nq (imp. eye flow) / S (imp. eye flow) : 19 / 36 Metric units	
MCSF : 26.83 USgpm	
Head, maximum, rated diameter : 52.02 ft	
Head rise to shutoff : 19.66 %	
Flow, best eff. point : 91.17 USgpm	
Flow ratio, rated / BEP : 100.00 %	
Diameter ratio (rated / max) : 100.00 %	
Head ratio (rated dia / max dia) : 100.00 %	
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010] : 1.00 / 1.00 / 1.00 / 1.00	
Selection status : Acceptable	

Pressure Data
Maximum working pressure : 22.51 psi.g
Maximum allowable working pressure : 175.0 psi.g
Maximum allowable suction pressure : 175.0 psi.g
Hydrostatic test pressure : 263.0 psi.g

Driver & Power Data (@Max density)
Motor sizing specification : Max power (non-overloading)
Margin over specification : 0.00 %
Service factor : 1.00
Power, hydraulic : 1.00 hp
Rated power (based on duty point) : 1.61 hp
Max power (non-overloading) : 1.85 hp
Nameplate motor rating : 3.00 hp / 2.24 kW

Energy Indexes
PEI (CL) : 0.97
ER (CL) : 3

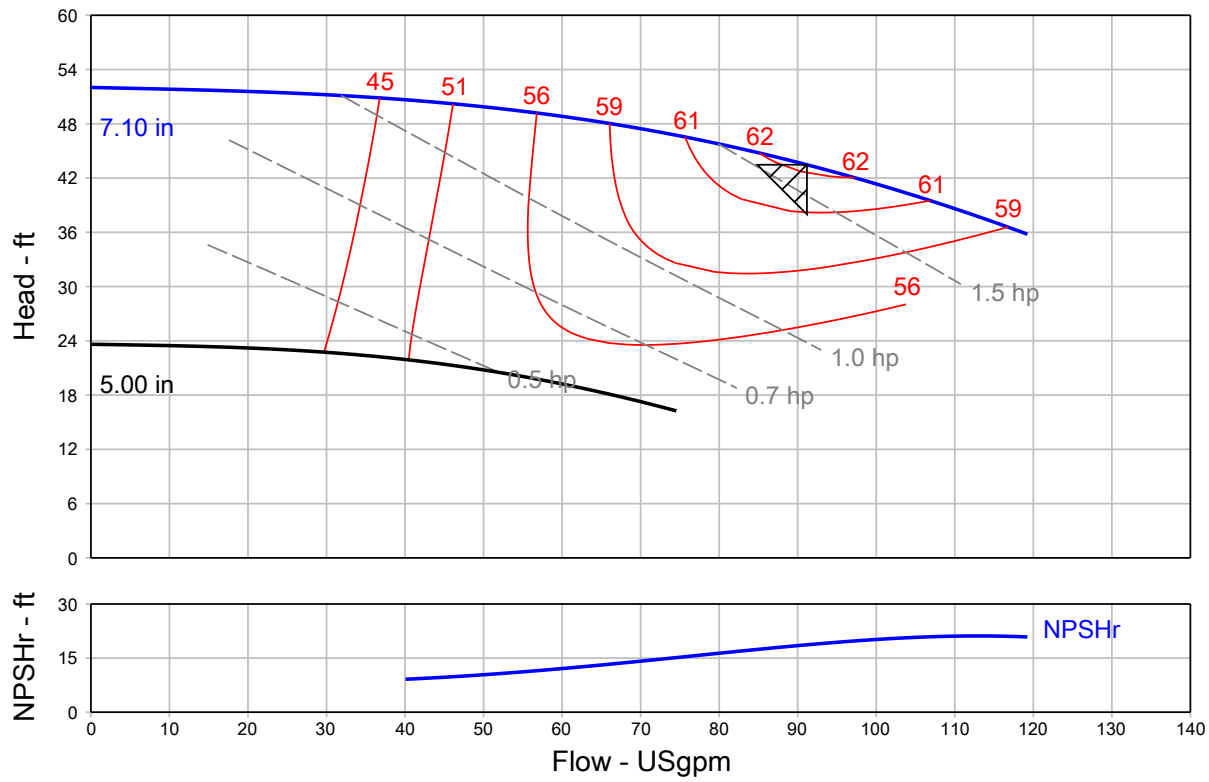

## Grundfos Series VLS - In-Line Centrifugal Pump, Split Coupled


QUOTE NUMBER / ID 1471203	UNIT TAG 001	QUANTITY 1
REPRESENTATIVE	SERVICE	
ENGINEER	SUBMITTED BY	DATE
CONTRACTOR	APPROVED BY	DATE
	ORDER #	DATE





**VLS 15709**  
**1730 rpm**

Part Number N/A

Conditions of Service		Pump Data		Motor Data	
Flow	91.17 USgpm	Impeller Diameter	7.10 in	Motor HP	3 HP
Head	43.47 ft	Max. Imp. Dia.	7.10 in	BHP	1.61 HP
Liquid	Cold Water	Min. Imp. Dia.	5.00 in	Enclosure	TEFC
Temperature	68.00 deg F	Efficiency	62.17 %	Voltage	230/460 V
NPSHr	18.68 ft	Suction	1.5 in.	Phase	3 Phase
Viscosity	1.00 cP	Discharge	1.5 in.	Cycle	60
Specific Gravity	1.000 SG	PEI (CL)	0.97	Frame Size	182TC
		ER (CL)	3		

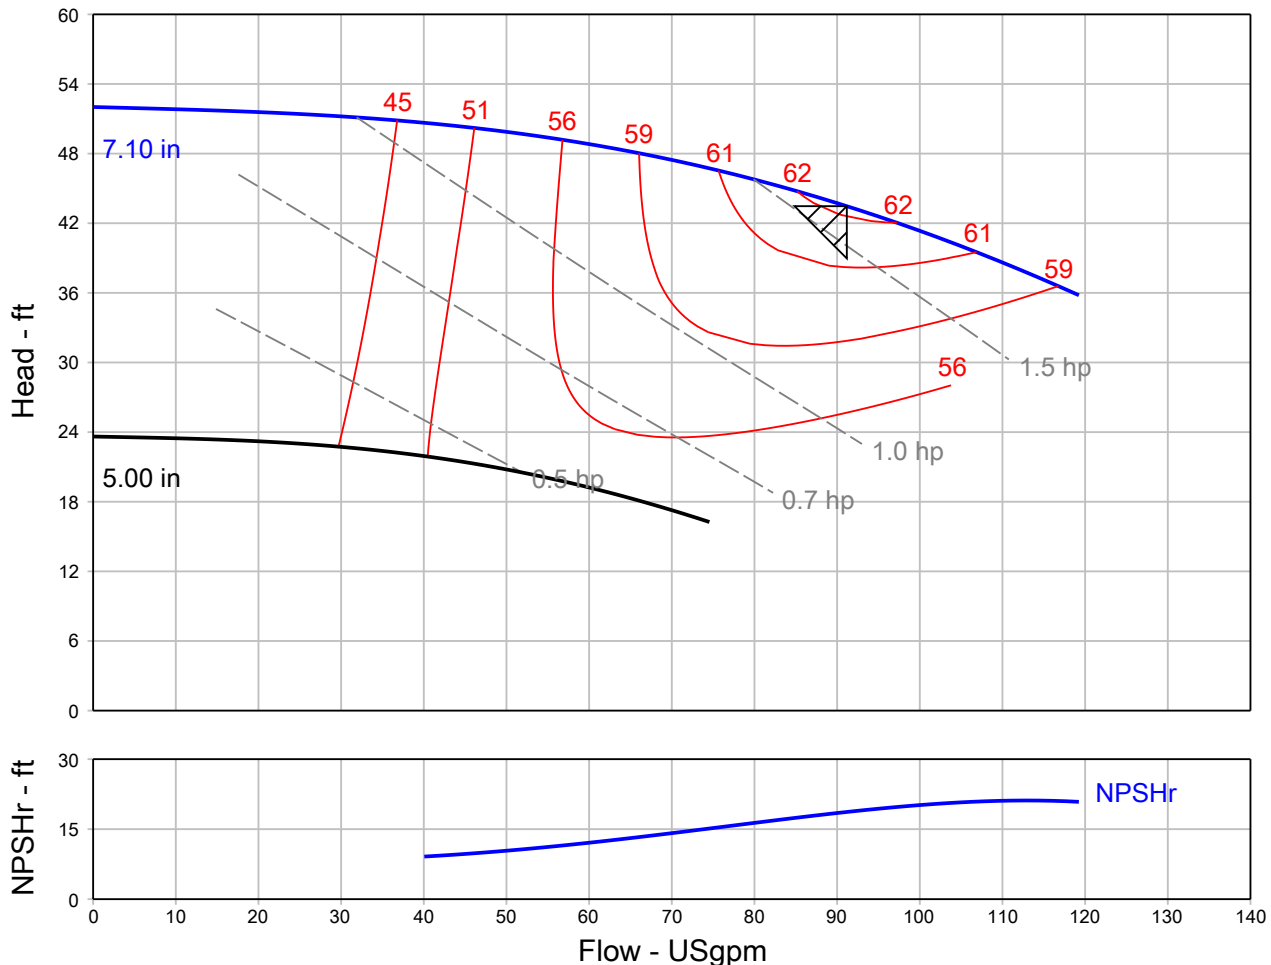

**Grundfos Series VLS - In-Line Centrifugal Pump, Split Coupled**

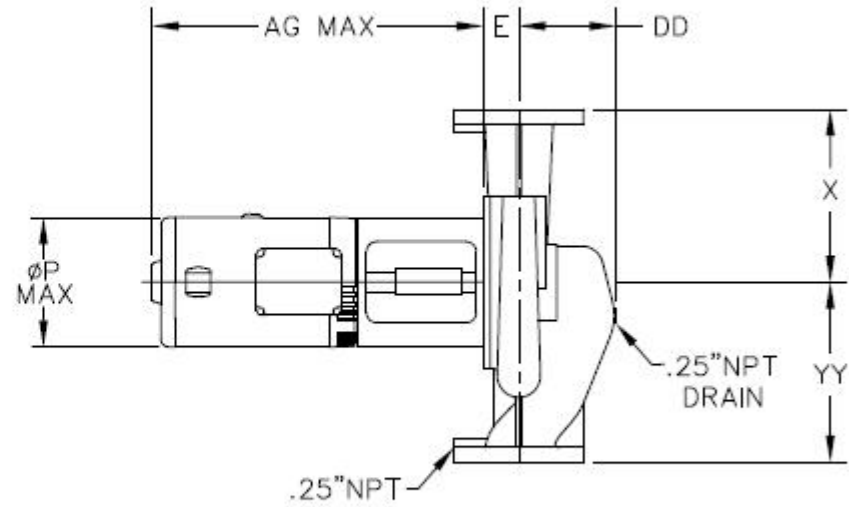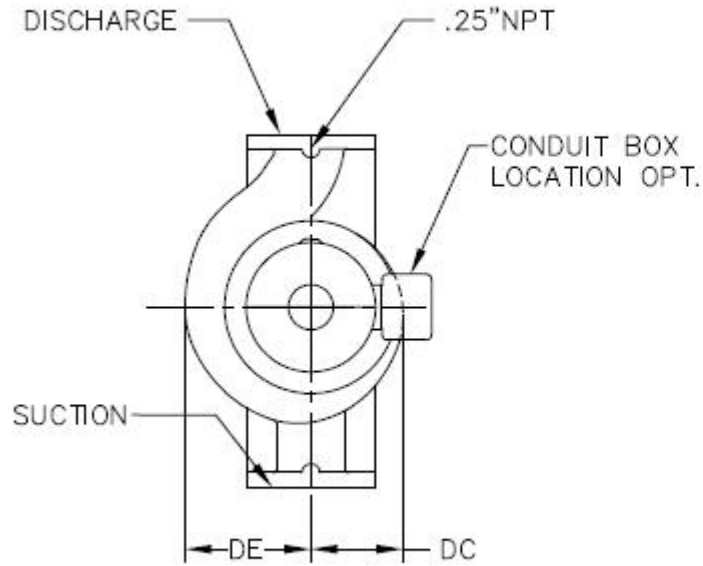

NOT FOR CONSTRUCTION, unless certified and referenced on order

Units	Frame	S x D	AG (Max)	DC	DD	DE	E	P (Max)	X	YY	Weight
inches	182TC	1.5 X 1.5	30.00	4.38	4.43	5.13	2.19	13.25	7.00	7.00	TBD